


An integrated system
for supplying
compressed air to
JB11 Air Jacking Beams

AIR DELIVERY SYSTEM

M O L N A R



HOISTS

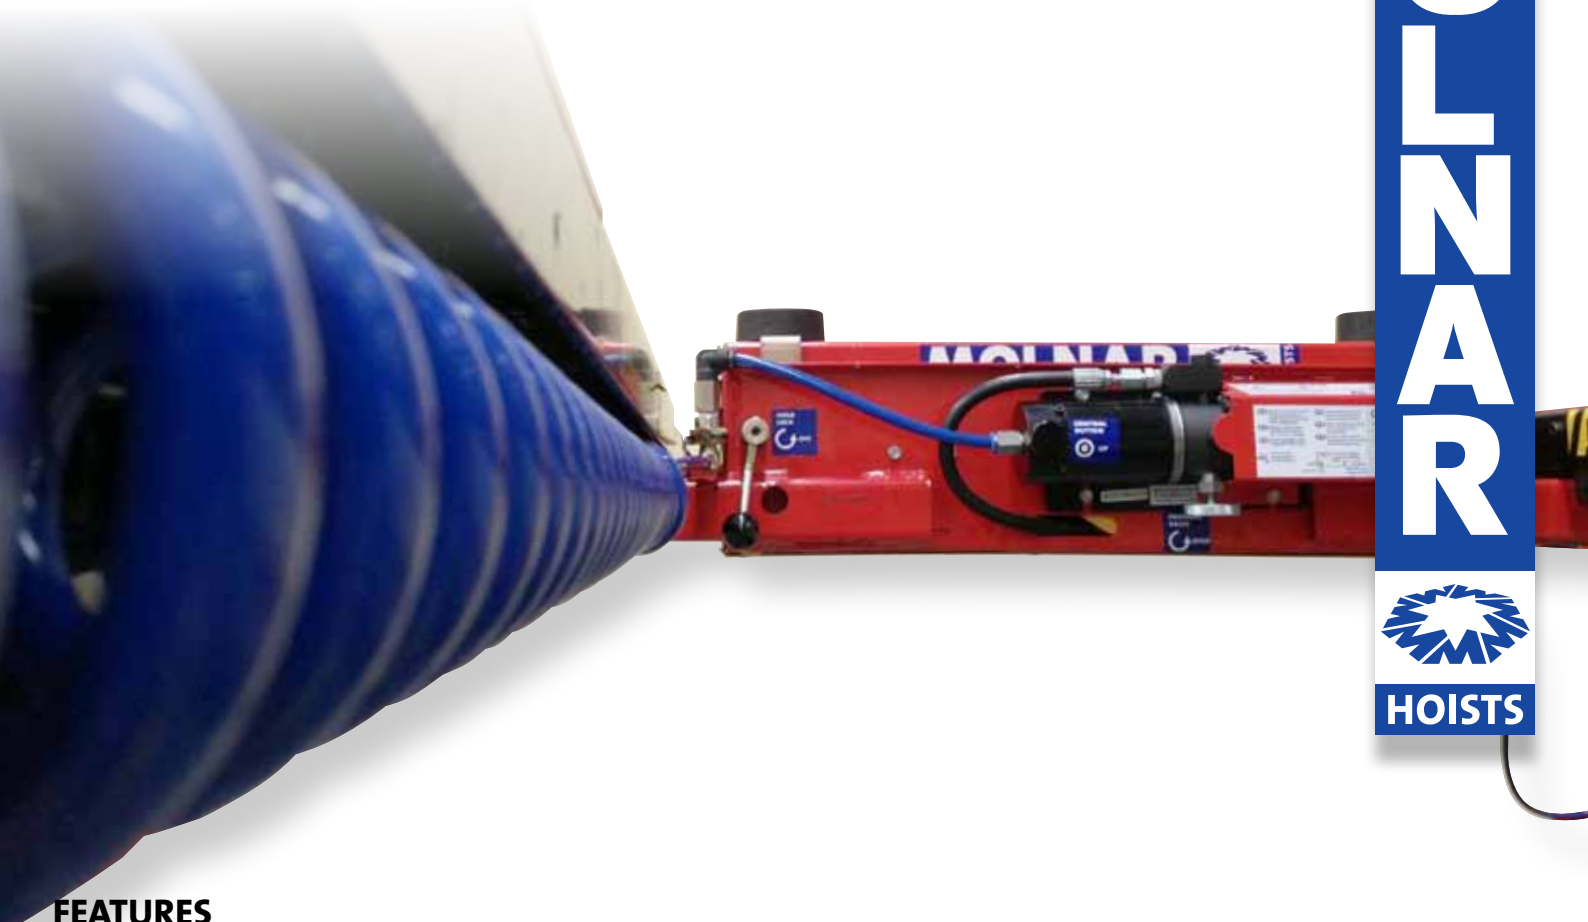


FEATURES

- Can be fitted to any existing Molnar 4 Post Hoist.
- All fittings and components provided, to supply air at any one of the four posts.
- Quickly and easily fitted with Molnar laser cut brackets.
- Simple and safe, integrated design.
- Filter-Regulator-Lubricator included for optimal air supply.
- Kits available for Single or Double Air Jacking Beams.
- Single system can be converted to Double system with Adaptor kit.


JB11 Jacking Beams sold separately

When operating, the MOLNAR JB11 AIR JACKING BEAM requires clean, dry compressed air at a minimum pressure of 7 Bar (100 psi) and minimum flow rate of 3.6 litres per second (7.6 CFM) to function correctly

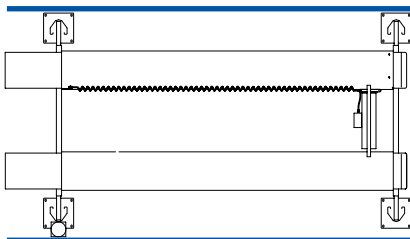


'SINGLE' 7001003

- Kit to suit Molnar 4 Post Hoist with a single Air Jacking Beam

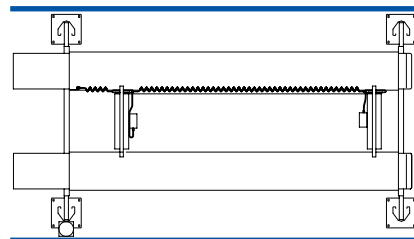

'DOUBLE' 7001002

- Kit to suit Molnar 4 Post Hoist with 2 Air Jacking Beams

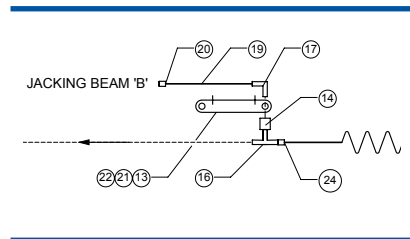

'ADAPTOR' 7001004

- Kit to convert a 7001003 Single system into a 7001002 Double

As the policy of Molnar Hoists is one of continuous improvement, the manufacturer reserves the right to change specifications without notice.



For more information, please contact
us or your local Molnar Representative

T 08 7120 8700 F 08 8346 0097
E sales@molnarhoists.com.au
www.molnarhoists.com.au

onwards & upwards

