


4488WR

4 TONNE
'RAILS, WHEEL ALIGN'
FOUR POST HOIST



MOLNAR

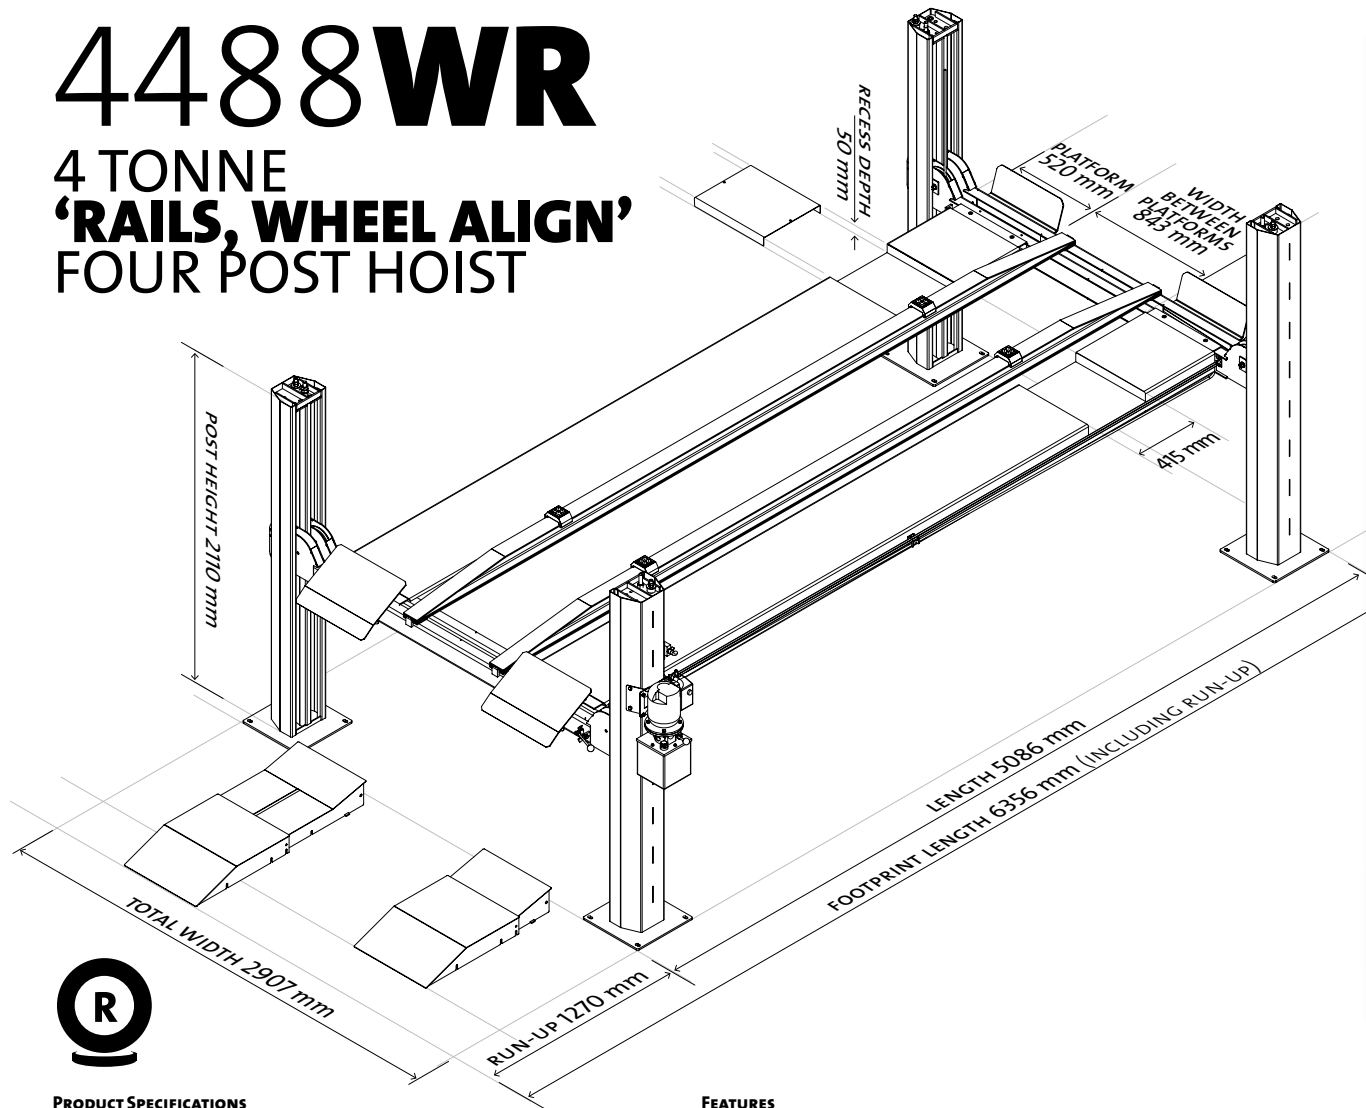

HOISTS

PRODUCT SPECIFICATIONS

| | |
|-------------------------|---|
| Footprint | 2907 x 6356 mm (including run-ups, extended) |
| Length | 5086 mm |
| Width | 2907 mm |
| Height | 2110 mm |
| Width Between Posts | 2340 mm |
| Width Between Platforms | 843 mm |
| Platform Length | 4580 mm |
| Platform Width | 520 mm |
| Run-Up Length | 945 mm extendable to 1270 mm |
| Motor | 3 Phase, 3 HorsePower, 415 Volt * (requires 3 Phase and Earth, 5 Amp) |
| Lifting Capacity | 4 tonnes |
| Maximum Raised Height | 1675 mm |
| Minimum Lowered Height | 170 mm |
| Minimum Lifting Time | 24 seconds |
| Concrete Depth | min 100 mm, mesh reinforced, min strength 25 MPa |
| Hydraulic Oil | high quality, 46 weight, anti-wear |
| Gross Weight | 1420 kg |
| Shipping Dimensions | 5.0 x 1.15 x 0.6 metres |
| Finish | powder coated for added durability |
| Warranty | 3 years |

As the policy of Molnar Hoists is one of continuous improvement, the manufacturer reserves the right to change specifications without notice.

FEATURES

| | |
|--------------------------|--|
| Wheel Turntable Position | wheel alignment recess for turntable positioning (includes removable cover plate) |
| Operational | 40mm incremental height adjustment push button to lift; lever to lower 4 beam pads included - JBBP |
| Safety | deadman controls (automatic stop when released) protection for cable breakage, overload and hydraulic failure |
| Service & Installation | comprehensive service manuals and installation instructions included |

CUSTOMISATION

| | |
|------------------|--|
| | control unit position |
| Colour | extensive range of powder coated colours available |
| 4488WR-240VOLT * | optional single phase, 240 Volt motor (requires 240 Volts under load at motor, hard wired on 20 Amp circuit) |
| Extra Long | 1 metre longer (6086 mm platforms) |

OPTIONAL ACCESSORIES

| | |
|-------------|---|
| LIB-04 | Slip Plates (pair) for vehicles with independent rear suspension |
| EXT-PAD | Beam Riser, Standard (for additional pick-up points) |
| EXT-PAD-LOW | Beam Riser, Lowered (for low profile vehicles) |
| AXLE-PU | Beam Riser, Axle (attach to rails for stable axle pick-up) |
| PL92-RB | Rubber Block, Standard (for cushioned lifting) |
| PL92-RB-40 | Rubber Block, Low Profile (for low profile vehicles) |
| SLO2-NEST | Rubber Block Nest |
| 7252-023-01 | Jack Stand (insert between platforms; turn upside down for a tool tray) |



For more information, please contact us or your local Molnar Representative

T 08 7120 8700 F 08 8346 0097

E sales@molnarhoists.com.au

www.molnarhoists.com.au

onwards & upwards