


PLATFORM LIFT

3 TONNE PLATFORM HOIST

PL92

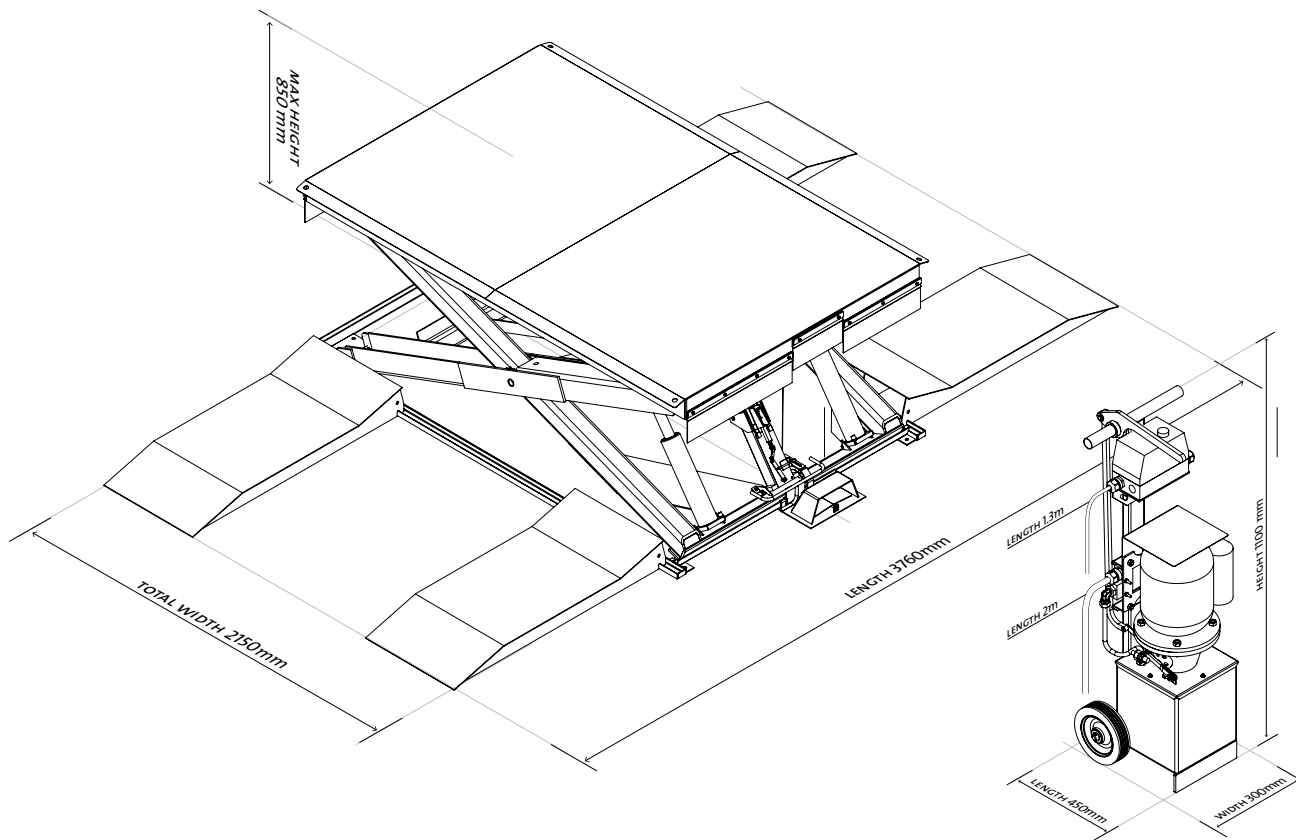

M O L N A R



HOISTS

PRODUCT SPECIFICATIONS

Footprint	2150 x 3760 mm
Length	3760 mm (including run-ups)
Width	2150 mm
Height	150 mm (when lowered)
Platform Length	1520 mm
Maximum Raised Height	850 mm
Minimum Lowered Height	160 mm
Motor	single phase, 240 Volt (requires 240 Volts under load at motor, hard wired on 20 Amp circuit)
Lifting Capacity	3 tonnes
Minimum Lifting Time	18 seconds
Concrete Depth	min 100 mm, mesh reinforced, min strength 25 MPa
Hydraulic Oil	high quality, 46 weight, anti-wear
Gross Weight	730 kg
Shipping Dimensions	2.3 x 1.7 x 0.6 metres
Finish	powder coated for added durability
Warranty	3 years

FEATURES

Operational	4 rubber pick up blocks included – PL92-RB run-up ramps have anti-theft lock-in design
Safety	mechanical lock device, with five lock positions = 850mm; 740mm; 620mm; 495mm; 345mm meets Australian Standard AS/NZ 1418.9:1996
Service & Installation	comprehensive service manuals and installation instructions included

CUSTOMISATION

Colour	extensive range of powder coated colours available
Hose	length of hydraulic hose, sized to suit
Coupling	quick release coupling on hydraulic hose

OPTIONAL ACCESSORIES

PL92-RB	Rubber Block, Standard (for cushioned lifting)
PL92-RB-40	Rubber Block, Low Profile (for low profile vehicles)
PL92-10	Platform Riser (Extension pad for extra clearance)

As the policy of Molnar Hoists is one of continuous improvement, the manufacturer reserves the right to change specifications without notice.



For more information, please contact
us or your local Molnar Representative

T 08 7120 8700 F 08 8346 0097
E sales@molnarhoists.com.au
www.molnarhoists.com.au

onwards & upwards